




Model: _____

Item #: _____ Quantity: _____

Project: _____

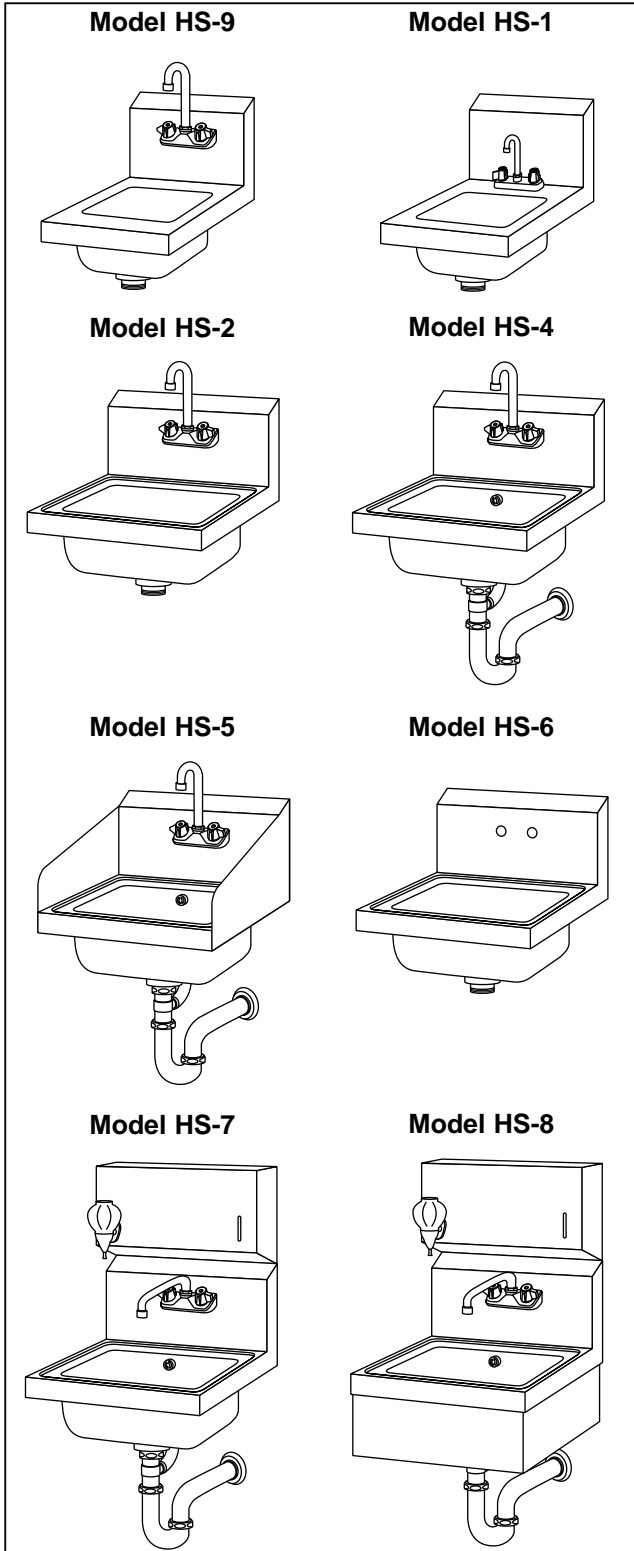

- **Fabrication:**
One piece 304 series stainless steel. All seams tig welded and polished.
- **Bowl:**
Deep drawn with stamped rim on 17" models to prevent spillage.
- **Wall Mounting Bracket:**
Offset design for added strength.
- **Faucet:**
4" OC faucet supplied (wall or deck).
- **Drain:**
Stainless Steel.
- **Drain with Overflow:**
Stainless Steel with plastic overflow tube and inlet.
- **Plumbing:**
1/2" IPS hot and cold water.
1 1/2" IPS drain outlet.

Hand Sinks

Approved By: _____

Model: _____ Item #: _____ Quantity: _____ Project: _____

<p>HS-9 12 lbs.</p>	<p>HS-1 12 lbs.</p>	<p>HS-2 14 lbs.</p>
<p>HS-4 14 lbs.</p>	<p>HS-5 15 lbs.</p>	<p>HS-6 11 lbs.</p>
<p>HS-7 30 lbs.</p>	<p>HS-8 35 lbs.</p>	<p>Plumbing Requirements: Install 36" Working Height 1/2" Faucet Supply 12" from Floor 1 1/2" Drain Line 23 1/4" from Floor</p>

Options: check box(es) for required option(s)

- | | |
|--|---|
| <input type="checkbox"/> H-100 Faucet Upgrade | <input type="checkbox"/> H-105 Wall Mounted Towel Dispenser |
| <input type="checkbox"/> H-101 1 1/2" IPS Chrome Plated P-Trap | <input type="checkbox"/> H-106 One Side Splash (specify side) |
| <input type="checkbox"/> H-102 Wrist Handle Faucet | <input type="checkbox"/> H-107 Two Side Splashes |
| <input type="checkbox"/> H-103 Wrist Handle Kit | <input type="checkbox"/> H-108 Side Mounting Wall Bracket |
| <input type="checkbox"/> H-104 Wall Mount Soap Dispenser | |

Approved By: _____

Due to our commitment to continued product improvement, specifications are subject to change without notice.