

# LUXURA


## Counter-Top Refrigerated (Sushi) Display Cases

Our DC Series features ultra-modern and sophisticated design; incorporating curved front tempered glass, with eye-catching appeal and attractive product visibility.



**Front opens for easy cleaning**  
**No drain connection required**

- Designed to display sushi, meats, salads, desserts and many other items for quick point of purchase sales
- Curved front tempered glass for added visibility, safety and increased durability
- New enlarged front hinged glass tilts forward to simplify cleaning and maximize eye appeal
- Interior lighting (with protective cover) enhances overall product appearance
- Removable sliding rear doors allow for easy access and simplify cleaning
- Upper double evaporator fin-type coil assures proper temperature throughout the cabinet, eliminating any danger of bacteria or food contamination
- SMARTEMP electronic thermostat maintains temperatures between 33°F/1°C and 40°F/7°C, digitally displays temperature at all times, and reaches the required temperature in only a few minutes
- Special "cold-diffusion" system provides uniformity of temperature throughout
- Upper stainless steel baffle plate creates a drip-free food safe environment
- In addition to the on/off switch, an added safety feature is incorporated whereby an automatic cut-off system will switch on/off the motor whenever defrosting is necessary
- Available in bronze or silver

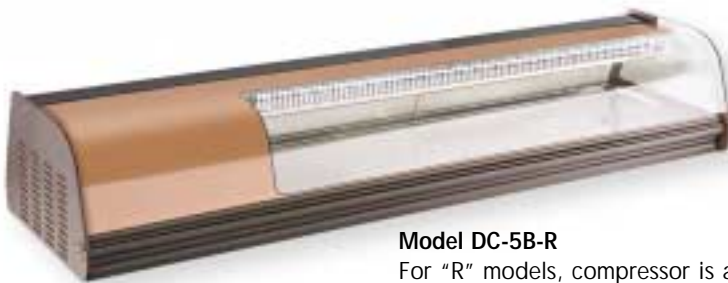

**Model DC-5B-R**  
For "R" models, compressor is at the right side when facing controls



**Model DC-6S-L**  
For "L" models, compressor is at the left side when facing controls

# JET-TECH

# LUXURA Counter-Top Refrigerated (Sushi) Display Cases

## Features

- Silent and sealed compressor with a double-vented high quality condensor
- 304 finish stainless steel deep drawn inner body
- Available in either a silver or bronze exterior finish
- Condensate from upper coil drains directly into a self contained evaporation channel, eliminating any drain connection requirement
- "Foamed-in-place" injected polyurethane lateral profiles
- Environmentally-friendly R-134A type freon and injected insulation throughout the entire body
- Designed to operate in an air-conditioned environment under a maximum ambient temperature of 77°F/25°C with a relative humidity of 55%

## Consultant Specification

The display case shall be a Jet-Tech "DC" series unit equipped with; a SMARTEMP electronic thermostat with digital temperature indicator, internal encased cool fluorescent light, a hinged/tilting curved tempered front glass, an upper double evaporator fin-type coil, an automatic drainage and evaporation system, removable rear sliding access doors, and a two year warranty on the condensor & compressor. It must be rated at 115v, be equipped with a 0.25 h.p. compressor, and come available in an anodized aluminum silver or bronze finish.

MODEL	COLOR	WIDTH		DEPTH		HEIGHT		NET WEIGHT	MAX CAPACITY	SHIPPING SPECS			
		EXT.	INT.	EXT.	INT.	EXT.	INT.			WIDTH	DEPTH	HEIGHT	WEIGHT
DC-5S-L	SILVER	57"	41.3"	15.6"	11.8"	*12.3"	6.2"	88 lbs	1.74 cu. ft.	66.2"	23.2"	22.5"	165 lbs
DC-5S-R	SILVER	57"	41.3"	15.6"	11.8"	*12.3"	6.2"	88 lbs	1.74 cu. ft.	66.2"	23.2"	22.5"	165 lbs
DC-5B-L	BRONZE	57"	41.3"	15.6"	11.8"	*12.3"	6.2"	88 lbs	1.74 cu. ft.	66.2"	23.2"	22.5"	165 lbs
DC-5B-R	BRONZE	57"	41.3"	15.6"	11.8"	*12.3"	6.2"	88 lbs	1.74 cu. ft.	66.2"	23.2"	22.5"	165 lbs
DC-6S-L	SILVER	70.5"	55"	15.6"	11.8"	*12.3"	6.2"	99 lbs	2.32 cu. ft.	79.2"	23.2"	22.5"	191.4 lbs
DC-6S-R	SILVER	70.5"	55"	15.6"	11.8"	*12.3"	6.2"	99 lbs	2.32 cu. ft.	79.2"	23.2"	22.5"	191.4 lbs
DC-6B-L	BRONZE	70.5"	55"	15.6"	11.8"	*12.3"	6.2"	99 lbs	2.32 cu. ft.	79.2"	23.2"	22.5"	191.4 lbs
DC-6B-R	BRONZE	70.5"	55"	15.6"	11.8"	*12.3"	6.2"	99 lbs	2.32 cu. ft.	79.2"	23.2"	22.5"	191.4 lbs
DC-7S-L	SILVER	84.3"	70"	15.6"	11.8"	*12.3"	6.2"	112.2 lbs	2.95 cu. ft.	91.3"	23.2"	22.5"	220 lbs
DC-7S-R	SILVER	84.3"	70"	15.6"	11.8"	*12.3"	6.2"	112.2 lbs	2.95 cu. ft.	91.3"	23.2"	22.5"	220 lbs
DC-7B-L	BRONZE	84.3"	70"	15.6"	11.8"	*12.3"	6.2"	112.2 lbs	2.95 cu. ft.	91.3"	23.2"	22.5"	220 lbs
DC-7B-R	BRONZE	84.3"	70"	15.6"	11.8"	*12.3"	6.2"	112.2 lbs	2.95 cu. ft.	91.3"	23.2"	22.5"	220 lbs

\* Units come equipped with 1" legs and optional 4" legs.

## Specifications

- Electrical: 115/60/1
- Voltage Variation: + - 10%
- Rated Amperage: 4.5 A
- Maximum Ambient Temperature: 77°F/25°C
- Saturation Temperature: 33°F/1°C (Ambient Temp. 77°F/25°C, No Load)
- Refrigerant Type: R-134A
- Maximum Load Height: 6.2"

**IMPORTANT:** This unit does not have an automatic defrost system and must be turned off at night to allow the evaporators to defrost.

**WARRANTY:** One (1) year parts & labor, two (2) years on the condensor & compressor



Electronic SMARTEMP adjustable thermostat



ANSI / NSF 7  
ANSI / NSF 4

## JET TECH SYSTEMS CORP.

TEL: (514) 737-9701 FAX: (514) 342-3854  
TOLL FREE TEL: (888) 275-4538 TOLL FREE FAX: (877) 453-8832  
jet-tech.com sales@jet-tech.com

In line with our continuing policy on research and product development, we reserve the right to alter specifications without notice.

