



PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

ST4472N/STD4472N/UC4472N/UCD4472N

Front-Breathing Flat Top and Undercounter Refrigerated Bases

Short Form Specifications

Exterior top is one-piece, 22-gauge stainless steel with integral 2.12" (5.1cm) square nosing at the front.

Exterior back and bottom is two-piece 24-gauge galvanized steel. Exterior ends are stainless steel.

Interior sides are thermoformed ABS plastic with shelf supports. Base is fully insulated with high-density foamed in place polyurethane.

Refrigeration system uses HFC-404A refrigerant. Compressor is 1/2 H.P., with condenser coil and condensate evaporator mounted on rear of the cabinet. Evaporator coils and temperature control are located on the interior rear wall of the cabinet. Refrigerant flow is controlled by a capillary tube. Cabinet maintains an interior cabinet temperature of 36°F to 40°F (2°C to 4°C).

Electrical connections are 115 volt, 60 Hertz, single phase. Unit has an 8' (2.4m) long electrical cord and NEMA 5-15P plug.

Casters: Equipment is mounted on 2" (5.08cm) diameter casters, with front three locking. Equipment clearance above the floor is 2.5" (6.35cm).

The following applies to three door models only

Doors have a 22-gauge stainless steel exterior, with thermoformed ABS plastic interior liner. Cabinet is supplied with one adjustable epoxy-coated wire shelf per door opening.

The following applies to six drawer models only

Drawer fronts have a 22-gauge stainless steel exterior, with thermoformed ABS plastic interior liner. Drawer frames are 14-gauge stainless steel. Drawer slides are 14-gauge stainless steel, with stainless steel bearings. Each top drawer will hold one 12" x 20" (30.5cm x 50.8cm) pan 4"-6" (10.1cm-15.2cm) deep. Each bottom drawer holds one 12" x 20" (30.8cm x 50.8 cm) pan 4" (10.6cm) deep. Pans are supplied by others.

Optional Accessories and Modifications

- 18" wide single tier overshelf
 - Stainless steel finish on back
 - Plastic laminate on front
 - Additional wire shelves
 - Door lock
 - 36" height available for UC
 - *220V/50 Hertz electrical system
- *Inclusion of this option will alter electrical specifications of the unit.




Model UC4472N






ST4472N/STD4472N/UC4472N/UCD4472N


Front-Breathing Flat Top and Undercounter Refrigerated Bases

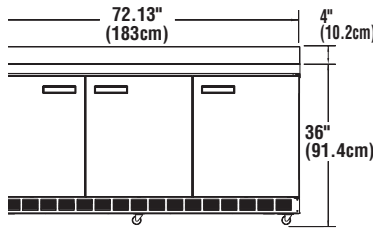


**ELEVATION VIEW
ST4472N**

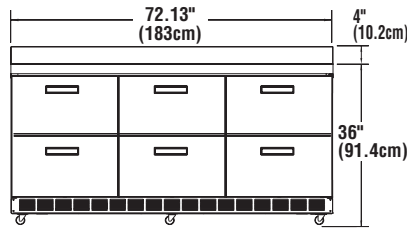


**ELEVATION VIEW
STD4472N**




**END VIEW
ST4472N**




**END VIEW
STD4472N**

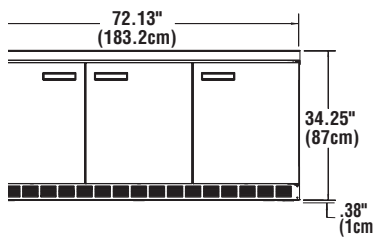


**ELEVATION VIEW
UC4472N**

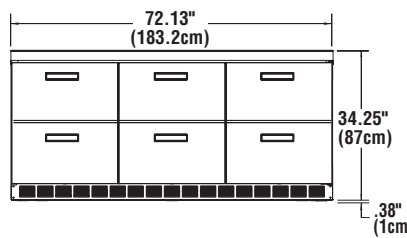


**ELEVATION VIEW
UCD4472N**




**END VIEW
UC4472N**



**END VIEW
UCD4472N**

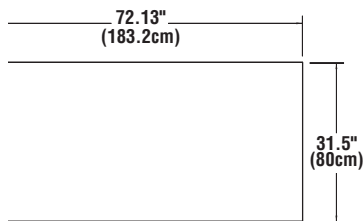

**PLAN VIEW
ALL MODELS**



**DOOR CLEARANCE
DETAIL**

INSTALLATION NOTE:

Refrigeration system is designed so that air will flow under the unit, through the compressor area and out the front of the unit. Any restriction to this air flow path will void the warranties.

NOTE: UC Models are shipped with an alternate caster kit, reducing the overall height to 34.25" (87cm)

Mechanical Data—Standard Unit

MODEL NUMBER	#OF SHELVES	SHELF AREA. SQ. FT.	STORAGE CAP. CU. FT.	H.P.	VOLTS/HERTZ/ PHASE	AMPS	NEMA PLUG	SHIP WEIGHT
ST4472N	2	8.42	18.7	1/2	115/60/1	12.0	5-15P	485 lbs/ 220 kg
STD4472N	NA	NA	4	1/2	115/60/1	12.0	5-15P	545 lbs/ 247 kg
UC4472N	2	8.42	18.7	1/2	115/60/1	12.0	5-15P	485 lbs/ 220 kg
UCD4472N	NA	NA	4	1/2	115/60/1	12.0	5-15P	545 lbs/ 247 kg