



## **FLAV-R-SAVOR®** TALL HUMIDIFIED HOLDING CABINETS

Models FSHC-17W1, FSHC-17W1D, FSHC-17W2, FSHC-17W2D

The Hatco Flav-R-Savor Tall Humidified Holding Cabinet is capable of holding all types of hot foods at optimum serving temperatures. Thermostatically-controlled *heat* and *humidity* safely keeps food at uniform temperatures and ideal environment. Foods stay fresh longer with less waste.

### **FLEXIBILITY**

The expanded capacity of the Tall Humidified Cabinet provides flexibility to hold a greater variety of menu items, or to prepare larger quantities of proven favorites ahead of time and hold it for hours.

The 17-tray capacity on 3" (76 mm) centers, adjustable on 1½" (38 mm) centers, with universal slides accommodates up to 17 sheet or Gastronorm pans, or up to 34 steam table pans.

Models are available with a solid back or a pass-through design, with a full view Lexan® door with full perimeter gasket and 5" (127 mm) casters.

Options include stainless steel or Dutch doors, a deluxe package containing flush mount handles and corner bumpers, and a transport package including stand-off handles, full perimeter bumper, heavy-duty 5" x 2" (127 x 51 mm) casters with two wheel locks, and flush mount transport latch.

### **QUALITY**

The following features assure the finest performance for years to come:

- The Hatco Flav-R-Savor Tall Humidified Holding Cabinet holds all types of hot foods at optimum serving temperatures.
- Separate heat and humidity controls are easily accessible.
- 17-tray capacity on 3" (76 mm) centers, adjustable on 1½" (38 mm) centers, with universal slides accommodates up to 17 sheet or Gastronorm pans, or up to 34 steam table pans.
- Fully insulated doors, sidewalls, and control panel assist in retaining heat.
- Right- or left-hand hinged doors with magnetic latch and heavy-duty plated hinges.



Model FSHC-17W1 with accessory food pans

METAL SHEATHED AIR HEATING ELEMENTS  
GUARANTEED AGAINST BURNOUT AND BREAKAGE  
FOR TWO YEARS.



**HATCO CORPORATION** P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
(800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976  
[www.hatcocorp.com](http://www.hatcocorp.com) • E-mail: [equipsales@hatcocorp.com](mailto:equipsales@hatcocorp.com)


Form No. FSHC-17W-1006(S)-1

Printed in U.S.A.



# FLAV-R-SAVOR® TALL HUMIDIFIED HOLDING CABINETS

Models FSHC-17W1, FSHC-17W1D, FSHC-17W2, FSHC-17W2D

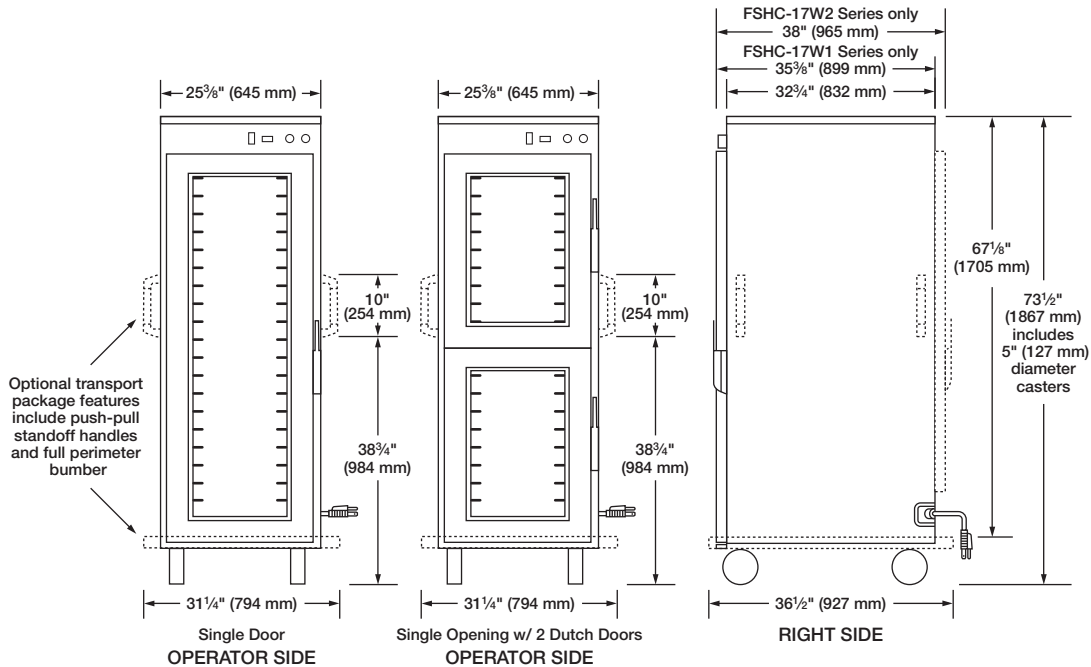

## SPECIFICATIONS

Model	Type	Shipping Weight
FSHC-17W1	Single Lexan® Door	295 lbs. (134 kg)
FSHC-17W1D	Single Opening w/ 2 Dutch Doors	305 lbs. (138 kg)
FSHC-17W2	2 Lexan® Doors – Pass-Through	325 lbs. (147 kg)
FSHC-17W2D	4 Dutch Doors – Pass-Through	340 lbs. (154 kg)


## WATER QUALITY REQUIREMENTS

Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

**Note:** Product failure caused by liming or sediment buildup is not covered under warranty.

## Pan Capacity

17-tray capacity on 3" (76 mm) centers, adjustable on 1½" (38 mm) centers, with universal slides designed to accommodate up to 17 sheet or Gastronorm pans, or up to 34 steam table pans.



## OPTIONS (NOT FOR RETROFIT)

- Deluxe Package (Includes Flush Mount Handles and Corner Bumpers)
- Transport Package (Includes Stand-off Handles, Full Perimeter Bumper, Heavy-duty 5" x 2" (127 x 51 mm) Casters, and Flush Mount Transport Latch)
- Cord Wind for Transport Package

## DIMENSIONS

FSHC-17W1, -17W1D: 25<sup>3</sup>/<sub>8</sub>" W x 35<sup>3</sup>/<sub>8</sub>" D x 73<sup>1</sup>/<sub>2</sub>" H (645 x 899 x 1867 mm).

FSHC-17W2, -17W2D: 25<sup>3</sup>/<sub>8</sub>" W x 38" D x 73<sup>1</sup>/<sub>2</sub>" H (645 x 965 x 1867 mm).

Cabinet Opening: 22" W x 59" H (559 x 1499 mm).

Water Reservoir Capacity: 1 gallon (4 liters).

## VOLTAGE

120 volts, 60 Hz, 1410 watts, 11.8 amps (uses NEMA 5-15P).


208 and 240 volts available (uses NEMA 6-15P).

Export voltages available.

## CORD LOCATION

Facing controls, right-hand side panel, bottom right corner.

## PLUG CONFIGURATIONS

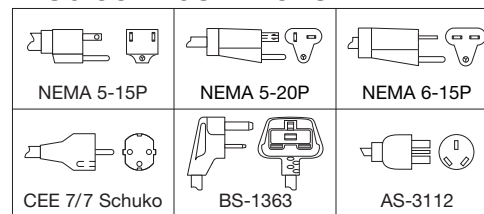

- Stainless Steel Door (In lieu of Lexan® Door)
- Stainless Steel Dutch Doors (In lieu of Lexan® Dutch Doors)

## ACCESSORIES

- Additional Slides
- Sheet Pans – Full- and Half-size

## PRODUCT SPECS

### Tall Humidified Holding Cabinet

The Tall Humidified Holding Cabinet shall be a Flav-R-Savor® Model ....., rated at ....volts, and ....watts, by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Cabinet shall consist of stainless steel construction with ....door(s), universal slides on 3" (76 mm) centers (adjustable on 1½" (38 mm) centers), insulated walls, 5" (127 mm) swivel

casters (two with wheel locks), and a 6' (1829 mm) cord with plug attached. It shall include a water reservoir, indicating temperature control, humidity selector switch, temperature selector dial, on-off power switch, and indicating lights.

Accessories shall include additional slides and food pans. Options include stainless steel door(s), dutch doors, Transport Package including stand-off handles, full perimeter bumper, and flush mount transport latch, or Deluxe Package including flush mount handles and corner bumpers.

**HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350**  
**Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com**