



**TRUE FOOD SERVICE EQUIPMENT, INC.**

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366  
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: \_\_\_\_\_

AIA #

Location: \_\_\_\_\_

SIS #

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model #: \_\_\_\_\_

**24" Glass Door Back Bar Storage Coolers**



**TBB-24-48G**

**24" Glass Door, Back Bar Storage Coolers**

- TBB-24-48G**,  **TBB-24GAL-48G**,
- TBB-24-60G** &  **TBB-24GAL-60G**

*True's oversized and balanced refrigeration system with extra large evaporator performs in the hottest, most humid climates. Excellent for all tropical beach bars.*

**SPECIFICATIONS / FEATURES**

**CABINET CONSTRUCTION:**

- 24" depth makes for easy placement in tight areas next to dry cabinetry.
- Durable, non-peel or chip black laminated vinyl exterior.
- TBB-24-48G and TBB-24-60G feature a finished stainless steel top. TBB-24GAL-48G and TBB-24GAL-60G features a galvanized steel top.
- Versatile flat top slides easily under bar or can be used as a counter/storage space.
- Interior - 300 series stainless steel floor with 1/2" lip and heavy galvanized steel walls. NSF-7 approved for prepackaged and bottled goods.
- Bright fluorescent interior lighting for excellent visibility.

**DOORS:**

- Energy efficient "Low-E" thermal glass within an extruded aluminum door frame, with reinforcing backing plates in each corner. Glass assembly replaceable without removing the door from hinges.
- Positive seal doors. Door gaskets of one piece construction, and removable for ease in cleaning.
- Doors Include 12" long vertical handle.

**INSULATION:**

- Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

**REFRIGERATION SYSTEM:**

- Refrigeration system factory balanced using CFC free 134A refrigerant.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33° to 38°F interior cabinet temperature.
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.
- Air vents on side to maximize flow of fresh air through condenser.

**ELECTRICAL CHARACTERISTICS:**

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



115/60/1  
NEMA-5-15R

*Remote cabinets available 14% off list (condensing units supplied by others). Consult factory technical service dept. for BTU information.*

Specifications subject to change without notice.

Printed in U.S.A.




**APPROVALS:**

11/03

Exceptions:



## 24" TBB-Series: Glass Door, Back Bar Storage Coolers

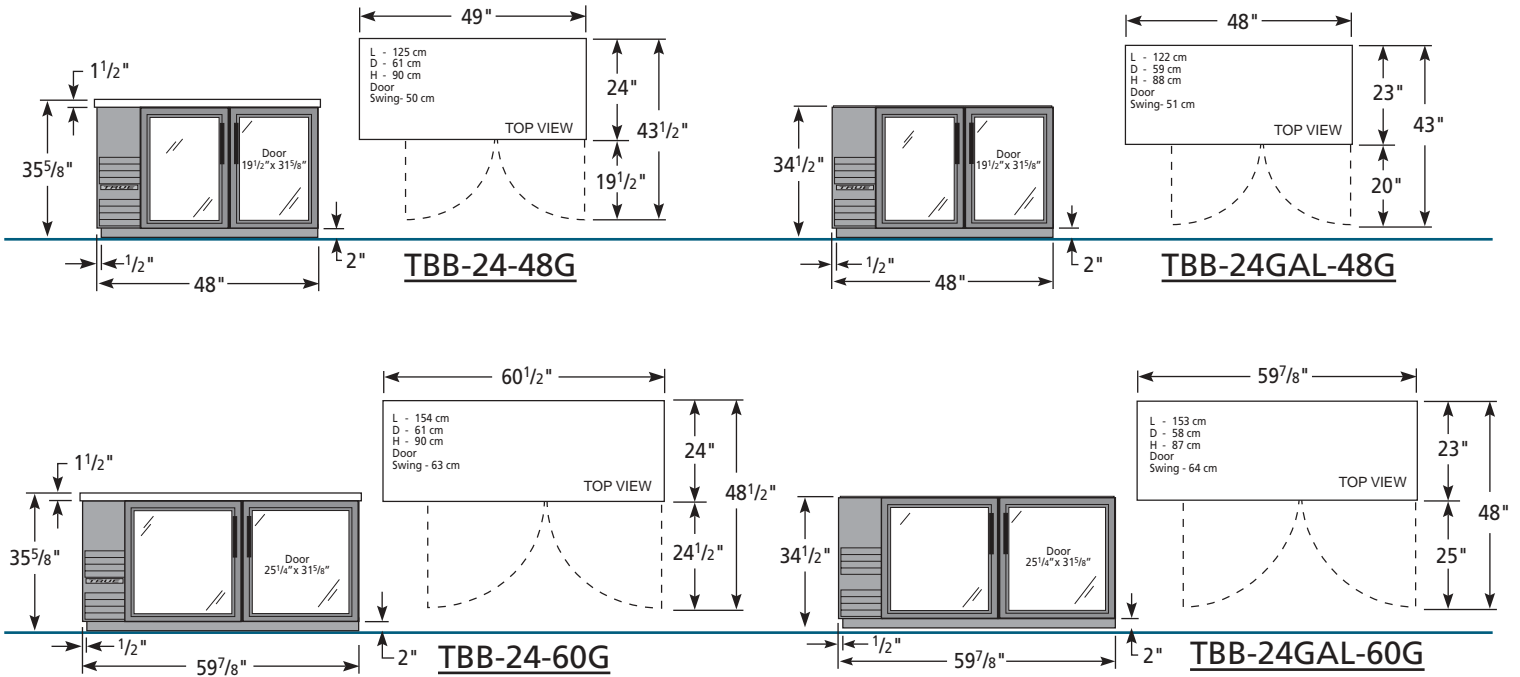

### Rough-In Data

Model	Doors	Shelves	12 oz. cans	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D†	H							
TBB-24-48-G	2	4	82 6-packs	49	24	35 5/8	1/3	115	1	7.6	5-15	7	285
TBB-24GAL-48G	2	4	82 6-packs	48	23	34 1/2	1/3	115	1	7.6	5-15	7	350
TBB-24-60G	2	4	133 6-packs	60 1/2	24	35 5/8	1/3	115	1	6.0	5-15	7	355
TBB-24GAL-60G	2	4	133 6-packs	59 7/8	23	34 1/2	1/3	115	1	7.7	5-15	7	350

† Depth does not include 1 3/8" for door handle.

Specifications subject to change without notice.

### Standard Features

- Oversized environmentally friendly (134A) refrigeration system maintains cold 33°F to 38°F product temperatures.
- 24" depth makes for easy placement in tight areas. Conserves valuable work space.
- TBB-24 models feature a finished stainless steel top providing an excellent work or storage area. TBB-24GAL models feature a galvanized steel top designed to slide under existing cabinetry providing a built-in look.
- Attractive, wear resistant laminated heavy duty blackvinyl exterior.
- Interior - 300 series stainless steel floor with 1/2" lip & heavy galvanized steel walls. NSF-7 approved for prepackaged and bottled goods.
- 2 heavy duty, 10 mill thick, pure grade black vinyl coated wire shelves per door.
- Positive seal doors, extruded aluminum door frames.
- Energy efficient "Low-E" thermal glass doors.
- Fluorescent interior lighting.
- Foamed-in-place high density polyurethane insulation (CFC free).
- Air vents on side of cooler.
- Slide out compressor can be serviced easily and accessed by a single repairman.
- Self-contained system.
- 1 year parts & labor warranty (USA).
- 5 year compressor warranty (USA).

### Optional Accessories

- 2 1/2" or 4" diameter castors.
- Additional shelves.
- Optional organizers:
  - one liter or wine bottle
  - 12 oz. bottle
- Remote cabinets available, consult factory.

Model	Front	Right	Plan	3D
TBB-24-48G	TFJX25E	TFJX25S	TFJX25P	TFJX253
TBB-24GAL-48G	TFJX26E	TFJX26S	TFJX26P	TFJX263
TBB-24-60G	TFJX47E	TFJX47S	TFJX47P	TFJX473
TBB-24GAL-60G				



### TRUE FOOD SERVICE EQUIPMENT

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366 • (636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com  
 Printed in U.S.A.

